

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 August 2005 (25.08.2005)

PCT

(10) International Publication Number
WO 2005/078546 A1

(51) International Patent Classification⁷: G05F 1/14

(21) International Application Number:
PCT/SE2005/000192

(22) International Filing Date: 11 February 2005 (11.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0400301-8 11 February 2004 (11.02.2004) SE

(71) Applicants and

(72) Inventors: SOLYOM, Stefan [RO/SE]; Vilandsvägen
16H:107, S-227 34 Lund (SE). LINCOLN, Bo [SE/SE];
Pilegatan 12B, S-222 29 Lund (SE). RANTZER, Anders
[SE/SE]; Drapavägen 63, S-224 74 Lund (SE).

(74) Agent: ABB AB; Legal & Compliance/Intellectual Property,
S-721 78 Västerås (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: POWER SYSTEM

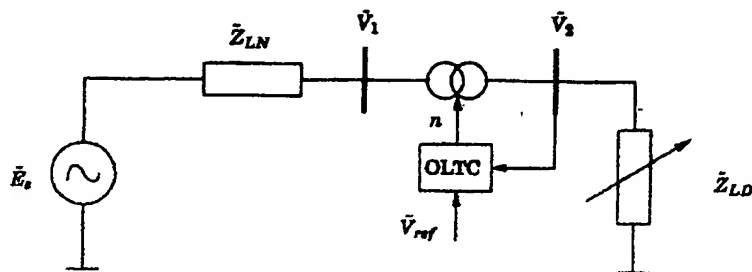

Two-node system with generator, transmission line, transformer and load.

(57) Abstract: The present invention relates to voltage stabilization of electrical power networks, and in particular to a method for voltage stabilization of an electrical power network system comprising a producing power network system side and a consuming power network side to maintain voltage, wherein the power transfer Y_{LD} , wherein Y_{LD} is power load impedance, is dynamically maintained below the loci for maximum power transfer, $n^2 Y_{LD} Z_{LN} = 1$, wherein Y_{LD} is power load impedance, Z_{LN} is transmission line impedance and n is transformer ratio, preferably Y_{LD} is maintained at a stable equilibrium.

BEST AVAILABLE COPY